


PVQ 18 DF

0.018" PTA Balloon Cather (Dialysis Fistulae)

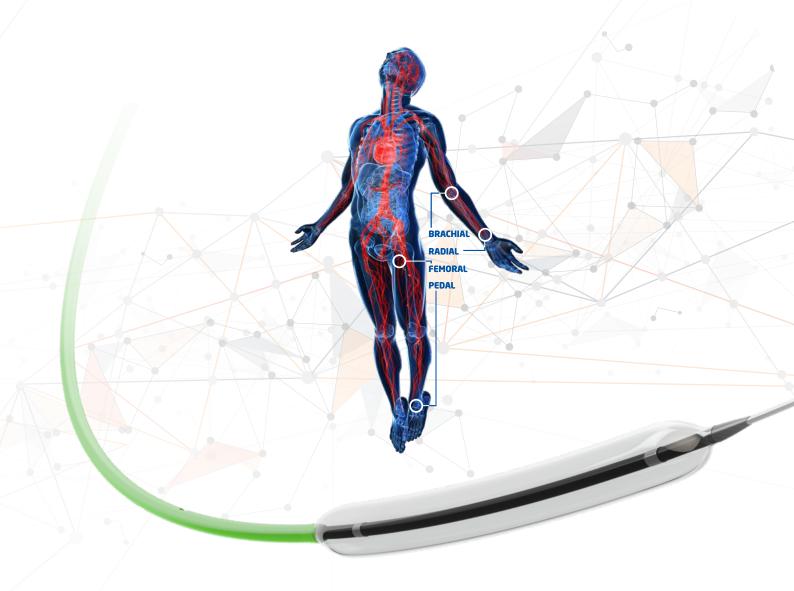

High rated burst pressure balloon for treatment of AV dialysis fistulae

5 F



Devices with 5 F Sheath Compatibility or smaller



MICRONICATION TM

NVASIVE TECHNOLOGIES

by QualiMed*

0.018" PTA Balloon Catheter (Dialysis Fistulae)

The PTA Balloon Catheter is indicated for Percutaneous Transluminal Angioplasty (PTA) in the peripheral vasculature, including iliac, femoral, ilio-femoral, popliteal, infra-popliteal and renal arteries, and for the treatment of obstructive lesions of native or synthetic arteriovenous dialysis fistulae.



Our focus is to enhance technology by developing devices with **Low Entry Tip Profiles**, guided by **Ergonomic Pushability** for your ease of use, especially in complex vessels, **Tactile Trackability for Enhanced Maneuvering**. **Rapid inflation/deflation** times are made possible via the **Dual Lumen Shaft Technology**.

ORDER INFORMATION

Balloon Ø	Balloon Length (mm)	UCL 45 cm	UCL 80 cm
4 mm	20	04PVQ040020BSD	08PVQ040020BSD
	40	04PVQ040040BSD	08PVQ040040BSD
			Minimum Balloon Profile 0.95 mr
Balloon Ø	Balloon Length (mm)	UCL 45 cm	UCL 80 cm
5 mm	20	04PVQ050020BSD	08PVQ050020BSD
	40	04PVQ050040BSD	08PVQ050040BSD
			Minimum Balloon Profile 1.20 mm
Balloon Ø	Balloon Length (mm)	UCL 45 cm	UCL 80 cm
6 mm	20	04PVQ060020BSD	08PVQ060020BSD
	40	04PVQ060040BSD	08PVQ060040BSD

Non-stock sizes require a minimum order of 5 units and will take up to 8 weeks for delivery

KEY FEATURES

- > Very low entry profile with a beveled tip to cross the most difficult lesions
- > Maximum flexibility for easy navigation to reach the most distal lesions
- > Fast inflation and deflation times to maximize efficiency during treatment and reducing the procedure time

BENEFITS

- > Increased pushability for a significant force transition from hub to tip
- > **High rated burst pressure** to optimize working range

PVQ 18 DF

0.018" PTA Balloon Catheter (Dialysis Fistulae)



TECHNICAL SPECIFICATIONS

Product Name	PTA Balloon Catheter (PVQ)	
Description	PTA Balloon Catheter Semi-Compliant OTW	
Recommended Guidewire (RGW)	· 0.018" (0.46 mm)	
Nominal Pressure	4 mm to 6 mm - 9 bar	
Rated Burst Pressure (RBP)	 Ø 4.0 mm & 5.0 mm - 22 bar Ø 6.0 mm x 20 mm - 20 bar Ø 6.0 mm x 40 mm - 18 bar 	
Working Catheter Length	45 cm 80 cm	
Platinum X ray Balloon Marker	One marker at proximal and distal end of balloon	
Low Entry Profile	0.50 mm (0.020")	
Balloon Material	Nylon	

COMPLIANCE TABLE

Pressure (bar)	Balloon Diameter (mm)		
	4	5	6
5	3.84	4.84	5.80
6	3.88	4.88	5.85
7	3.92	4.92	5.90
8	3.96	4.96	5.95
9	4.00	5.00	6.00
10	4.04	5.04	6.05
11	4.08	5.08	6.10
12	4.12	5.12	6.15
13	4.16	5.16	6.20
14	4.20	5.20	6.25
15	4.24	5.24	6.30
16	4.28	5.28	6.35
17	4.32	5.32	6.40
18	4.36	5.36	6.45
19	4.40	5.40	6.50
20	4.44	5.44	6.55
21	4.48	5.48	6.60
22	4.52	5.52	6.65
Nominal pressure	9	9	9
RBP	22	22	20 18



Phone +49 4171 6578 0 | Fax +49 4171 6578 11

